


DECK CROSS SECTION

FLOOR FRAMING

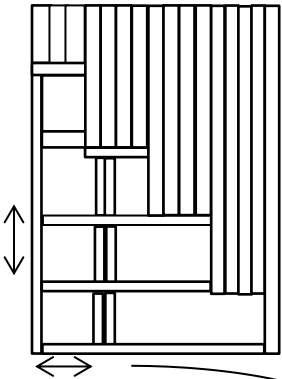

Complete the following:  
**Guards:**  
 Height: \_\_\_\_\_"  
 (Minimum-900mm if deck 600mm to 1800 mm above finished grade. 1070 mm if deck greater than 1800 mm above finished grade.)

Spindle spacing: \_\_\_\_\_"  
 (Spaced not more than 100 mm)


**Floor Framing:**  
 Joist size: 2 X \_\_\_\_\_  
 Joist spacing: \_\_\_\_\_"  
 Beam size: 2 X \_\_\_\_\_  
 # Piles: 2  3  4

**Column Size:**  
 4 X 4   
 4 X 6   
 6 X 6   
 Other: \_\_\_\_\_  
 Spacing: \_\_\_\_\_" o.c.

**Foundation:**  
 Piles:   
 Diameter: \_\_\_\_\_" o.c.  
 Depth: \_\_\_\_\_'  
 Pier Blocks:   
 Screw Piles:   
 Concrete Pad:   
 Set in Ground:

**Joist Cantilever:** \_\_\_\_\_"  
 (Maximums: 2 X 6 - 16"  
 2 X 8 - 24"  
 2 X 10 - 30")

**Decking:** \_\_\_\_\_  
 (2 X 4, 5/4 X 6, plywood, etc.)

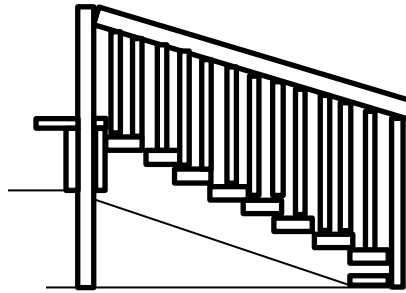

Stair Cross Section

Complete the following:

Column Cross Bracing

